

Bellatrix Series Electronic Pressure Switch



Introduction:

The Bellatrix Series — smart, rugged, and engineered for precision pressure control.

The Bellatrix Series of electronic pressure switches are designed for modern industrial environments where accuracy, reliability, and seamless integration with automation systems are critical. Built for OEMs, system integrators, and plant operators, Bellatrix combines high-resolution electronic sensing, configurable switching logic, and flexible output options in a compact, field-ready device.

Specifications:

Output : Digital O/p - 02, Analog O/p - 01
Process connection : 1/4" BSPF
(other options available)
Sensing element : Ceramic / SS
P max and Proof pressure : 1.5 x rated pressure
Vacuum resistance : -1 bar
Type of pressure : Gauge / Absolute / Differential

Electrical data

Operating voltage : 18 – 30 VDC
Current consumption : <35 mA at 24V
Min. insulation resistance : 100MΩ (500 VDC)
Protection class : III
Reverse polarity protection : Yes
Integrated watch dog : Yes

Operating conditions

Ambient temp. : (-)25°C ~ 80°C
Storage temp. : (-)40°C ~ 80°C
Media temp. : (-)25°C ~ 80°C

Response times

Response time (ms) : < 3
Delay time programmable : 0 ~ 50 ds, dr (s)
Max response time analog o/p (ms) : 3
Damping process value dAP (s) : 0...4
Damping for the analog o/p (s) : 0...4

Mechanical data

Min pressure cycles : 10 thousand

Display : LCD graphical colour display (06 Digit)

Electrical connection

Connector : M12 x 1 (4 pin / 5 pin plug connector)

Designed to replace conventional mechanical switches with a smarter alternative, the Bellatrix Series delivers stable and repeatable switching performance across demanding applications such as compressors, hydraulics, pneumatics, machine tools, pumps, and process skids. With an intuitive digital interface and support for modern industrial communication standards, Bellatrix simplifies commissioning, reduces wiring complexity, and enables condition monitoring and diagnostics at the device level.


Outputs

Electrical design : PNP/NPN
O/p function : NO/NC (parameterisable)
Max volt. drop switching o/p DC : 2.5 V
Permanent current rating of switching o/p DC :
50 mA for each o/p
Switching frequency DC : <500 Hz
Short circuit protection : Yes
Type of circuit protection : Pulsed
Overload protection : Yes
Current o/p : 4-20 mA
Scanning rate : 2 ms
Voltage o/p : 0-10 VDC
Rating : max 10 mA
Adjustment range : 25% ~ 100% FSR

Accuracy / deviations

Switch point accuracy : < ± 0.5 (% of span)
Repeatability : < ± 0.1 (% of span)
Characteristics deviation : < ± 0.25 (BFSL)/
< ± 0.5 (LS)
BFSL – Best fit straight line
LS – Limit value setting
Hysteresis deviation : < ± 0.25 (% of span)
Long term stability : < ± 0.5 (% of span)
per 06 months
Temp. coefficient zero point : 0.2 [(-)25°C ~ 80°C]
(% of span/10k)
Temp. coefficient span : 0.2 [(-)25°C ~ 80°C]
(% of span/10k)

Installation Drawing:

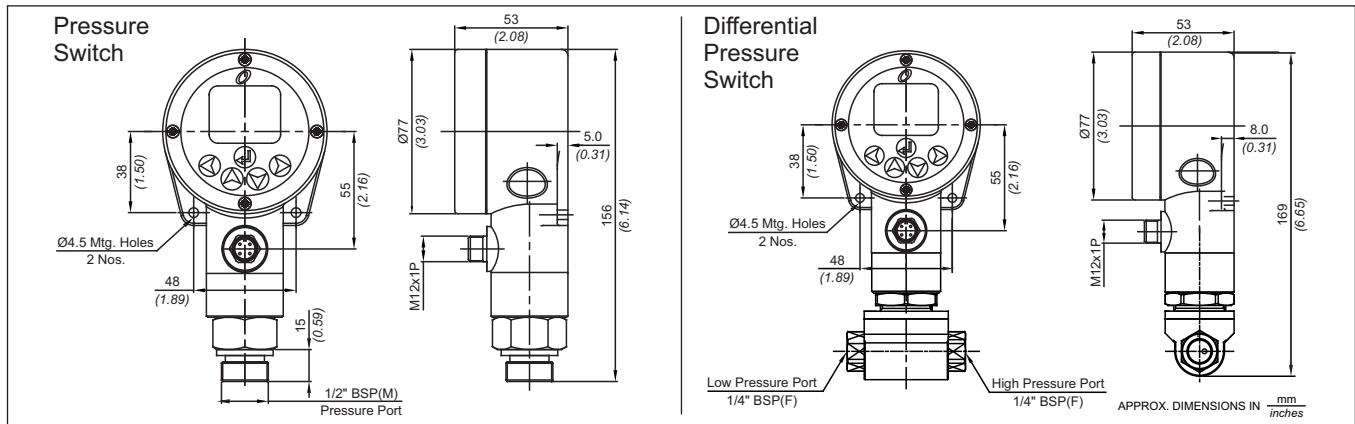

Electrical Connections:

Pins	M12 x 1 (5 pin male connector)
1	U+
2	SP2
3	U-
4	SP1
5	S+

Legend :

U+ = Positive power supply terminal
 U- = Negative power supply terminal (GND)
 SP1 = Switching output terminal 1 (Digital)
 SP2 = Switching output terminal 2 (Digital)
 S+ = Positive output terminal 1 (Analog)

Range code table (Scale - bar):

Pressure range:

Code	H01	H07	H10	H15	H25	H4T	H1H	H2H	H4H	H6H
*Range	0 ~ 1	0 ~ 7	0 ~ 10	0 ~ 15	0 ~ 25	0 ~ 40	0 ~ 100	0 ~ 200	0 ~ 400	0 ~ 600

How to order:

Group 1	Group 2	Group 3	Group 4	Group 5	Group 6	Group 7	Group 8
Non std allocation	Model	Version + Enclosure type	Device + Pressure type	Pressure Range	Electrical Output	Communi- cation Options	Pressure Port and Sensor Type
☐ A prefix "N" is used in the model code in case of any non standard options / accessories that are provided with this product Approx. Weight : PG/PA = 500gm. PD = 700gm.	BX = Pressure transmitter with colour display (6 digit)	01 = polycarbonate enclosure 03 = SS enclosure (type 1) 04 = SS enclosure (type 2) Contact sales office for details about options 03/04	PG = Gauge pressure PA = Absolute pressure PD = Differential pressure PC = Compound pressure	*Please select a range from the range code table above	E2 = 4-20 mA + 02 switching o/p Please refer Electrical Connection table above	#0 = no communication 1 = IoT #Available only with option 01 from Gr. 3	For PG & PA P001 = 1/2" BSPM P002 = 1/2" NPTM P005 = Triclover P006 = 1/2" BSPM flush diaphragm For PD D001 = 1/4" BSPF D002 = 1/4" NPTF D003 = 1/4" BSPF (Board mount bidirectional)

*Actual pressure range will differ as per option selected from Group 4, in How to Order Table above.

Note : Please contact sales office for a feature to display any unit other than 'bar'; and pressure ports other than mentioned in group 8 above.

Note : As efforts are being made constantly to improve the design and method of manufacture, the product being supplied may differ in detail from illustration and data printed in this document. Please check our website for the updated information and contact our sales office for the specifications while ordering the product.



Kaustubha Udyog (Orion Instruments)

AN ISO9001:2015 COMPANY

S. No. 36/1/1, Sinhgad Road, Vadgaon Khurd, Near Lokmat Press, Pune 411 041 INDIA

Tel. : +91-(0) 20-24393577 / 24393877

Certificate No.: FM 72815 Email : ku.pressure@gmail.com / info@orion-instruments.io

Website : www.orion-instruments.io



Scan for the updated catalogue